



WATER PROOFING

FLASHING - CEMENT TILES
METAL SHEETING



DESCRIPTION

Home Water Proofing is a flexible acrylic based two part water proofing, to be applied in conjunction with a bonded polyester membrane.

USES

- Flashings
- Sealing joints, laps & roofing screws on corrugated roofs
- Parapet Walls

BENEFITS


- Excellent Adhesion
- Ease of Use
- Flexible

APPLICATION

Apply a generous base coat to prepared surface & embed the membrane into the base coat while it is still wet, then apply pressure on the second coat to ensure complete saturation. When touch dry, apply a final top coat & allow to dry. A decorative can be applied to water-proofing.

LIMITATIONS: Ambient & surface temperatures must be between 5°C & 35°C - **DONT APPLY IF RAIN IS IMMINENT**

NOTE: TO ACHIEVE BEST RESULTS WATERPROOFING MUST BE USED IN CONJUNCTION WITH MEMBRANE

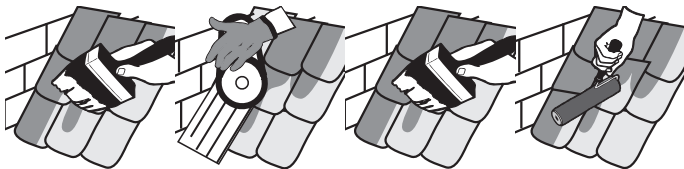

Apply water-proofing generously to prepared surface

Apply pressure to ensure complete saturation

Before water-proofing has dried, apply second coat

Decorative coat can be applied to water-proofing

SPREADING RATE

This product will cover approximately 1,5m²/litre, depending on surface porosity.

TECHNICAL DATA

TYPE	Acrylic Based
FINISH	Matt
DRYING TIME @ 25°C	Touch Dry: 2 Hours
RE-COATING TIME	6 Hours
VISCOSITY	100/120 Kp
WASH ABILITY	
PACK SIZE	1Lt / 5Lt

SURFACE PREPARATION

NEW SURFACES: Surface/s must be thoroughly clean, dry & in sound condition before commencing work

CEMENT PLASTER/ BRICKWORK/ ASBESTOS OR FIBRE CEMENT: Apply one coat of Plaster Primer, followed by one coat of Universal Undercoat & two topcoats of paint in the desired finish & colour

GYPHUM PLASTER: Apply one coat of Plaster Primer thinned by 20% with Mineral Turpentine to aid penetration. Apply one coat of Universal Undercoat (if applicable) & two topcoats of paint in the desired finish & colour

PREVIOUSLY PAINTED SURFACES: Surface/s in poor condition such as Powdery/Chalked Pva or Lime-Wash. Thoroughly clean & prepare surface by wire brushing & removing all dirt, grease, grime & flaking paint before painting. Apply one coat of Plaster Primer, followed by one coat of Universal Undercoat (if necessary) & two topcoats of paint in the desired finish.

PRECAUTIONS: Do not apply if rain is imminent • Apply at an ambient temperature lower than 35°C • Keep out of reach of children • Wash hands with Mineral Turpentine immediately after use • Skin or Eye contact: clean with fresh water and consult a physician if necessary • Wear protective clothing such as Overall, Gloves, Goggles etc

QUALITY GUARANTEE: This product is quality guaranteed to last under normal conditions, provided that the "Instructions for Use" appearing on the reverse side of each can have been correctly followed by the customer.

The information contained in this data sheet is provided in good faith & correct to the best of our knowledge, but Africa Paints reserves the right to change these specifications if deemed necessary.

PRODUCT DATA SHEET

